




Aluminum/Steel Combination Straight-frame, Spread-axle Flatbed 48', Air-ride

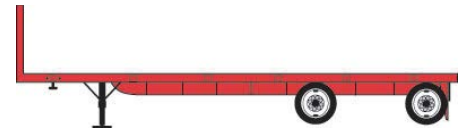

FEATURES AND BENEFITS

All XTRA Lease trailers are spec'd to resist damage, ease loading and reduce maintenance costs. Here are just a few of the top features and benefits for this spec.

Loader Friendly

- Cargo Control Sliding Winches
- Auxiliary Dump Valve
- Spread Axle for Increased Payload Capacity
- Center Coil Package

Extended Maintenance

- Extended Life Brake Linings
- Synthetic Grease Wheel Ends
- Self-Lubricating Landing Gear

Damage Resistant

- Heavy Duty Rub Rails

SPECIFICATIONS

Overall Length	48'
Overall Width	102"
Deck Height	55"
Coupler Height	49"
Kingpin Setting	30"
Weight	10,200 lbs. +/- 3% (includes aluminum bulkhead)
Suspension	Fixed 10' 2" spread axle, air-ride suspension. Airbags equipped with self-regulating height control valve. Auxiliary electric dump valve wired to rear axle
Axles	7/16" axle wall, 23,000 lb. capacity with synthetic wheel-end lubricant
Tires	295/75R 22.5 premium radial tires
Wheels	8.25" x 22.5" steel hub-piloted wheels
Brakes	16-1/2" x 7" x 3/4" s-cam, quick-change, extended life brake shoes
ABS	4 sensor / 2 modulator-valve system
Upper Coupler	AAR certified coupler with 1/4" pick-up and 5th-wheel plates. Interior coupler surfaces sealed with corrosion resistant coating
Main Frame	Fabricated high-tensile steel main beams
Side Rails	5-3/4" aluminum extrusion
Rub Rails	3/8" x 3" wide aluminum rub rails. Full length both sides and rear with double pipe spool reinforcements
Stake Pockets	Extruded aluminum, external steel stake pockets on 24" centers. Full length both sides and rear, steel on front



Aluminum/Steel Combination Straight-frame, Spread-axle Flatbed 48', Air-ride

SPECIFICATIONS

Crossmembers	4" steel I-beam crossmembers on 12" centers, center coil package
Landing Gear	AAR certified, self – lubricating 2-speed landing gear with internal gearbox and cushion sand shoes.
Cargo Control	12 sliding winches, roadside
Floor	1-1/8" aluminum floor with (4) apitong nailing strips
Bulkhead	48" flat, removable aluminum bulkhead with restraint brackets
Lights & Wiring	Sealed-beam lights with a fully sealed wiring harness and internal ground
Electrical Connections	7-way ATA plug with no circuit breakers
Air Connections	Stationary gladhands mounted on roadside

Trailer specification features may vary based upon manufacturer, model year, trailer type and location.
Equipment is subject to availability at each location.