




# Aluminum/Steel Straight-frame, Spread-axle Flatbed

53', Air-ride  
Model Year 2016

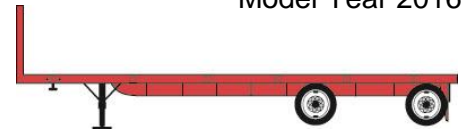

## FEATURES AND BENEFITS

All XTRA Lease trailers are spec'd to resist damage, ease loading and reduce maintenance costs. Here are just a few of the top features and benefits for this spec.

### Loader Friendly

- Cargo Control Sliding Winches
- Auxiliary Dump Valve
- Spread Axle for Increased Payload Capacity
- Center Coil Package

### Extended Maintenance

- Extended Life Brake Linings
- Synthetic Grease Wheel Ends
- Self-Lubricating Landing Gear

### Damage Resistant

- Integrated Aluminum Side Rub Rails

## SPECIFICATIONS

|                        |  |
|------------------------|--|
| <b>Overall Length</b>  | 53'  |
| <b>Overall Width</b>   | 102"   |
| <b>Deck Height</b>     | 51"  |
| <b>Coupler Height</b>  | 49"  |
| <b>Kingpin Setting</b> | 30"  |
| <b>Weight</b>          | 10,895 lbs. +/- 3% (includes aluminum bulkhead)  |
| <b>Suspension</b>      | Fixed 10' 2" spread axle, air-ride suspension. Airbags equipped with self-regulating height control valve, electric dump valve on rear axle wired to auxiliary socket, mounted at nose. Automatic gladhand dump valve dumps air when parking brake is set. |
| <b>Axles</b>           | 7/16" axle wall, 23,000 lb. capacity with synthetic wheel-end lubricant  |
| <b>Tires</b>           | 295/75R 22.5 radial tires for spread axle application  |
| <b>Wheels</b>          | 8.25" x 22.5" steel hub-piloted wheels   |
| <b>Brakes</b>          | 16-1/2" x 7" x 7/8" s-cam, quick-change, extended life brake shoes   |
| <b>ABS</b>             | 4 sensor / 2 modulator-valve system  |
| <b>Upper Coupler</b>   | AAR certified coupler with 1/4" pick-up and 5th-wheel plates. Interior coupler surfaces sealed with corrosion resistant coating  |
| <b>Main Frame</b>      | Fabricated high-tensile steel main beams   |
| <b>Side Rails</b>      | Aluminum with integrated routed stake pockets  |
| <b>Rub Rails</b>       | Integrated into side rail  |



# Aluminum/Steel Combination Straight-frame, Spread-axle Flatbed

48', Air-ride  
Model Year 2016

## SPECIFICATIONS

|                               |   |
|-------------------------------|---|
| <b>Stake Pockets</b>          | Internal aluminum stake pockets on 24" centers. Full length both sides, front and rear. Two load securement openings between pockets. |
| <b>Crossmembers</b>           | 4" steel I-beam crossmembers on 12" centers, center coil package  |
| <b>Landing Gear</b>           | AAR certified, self – lubricating 2-speed landing gear with internal gearbox and cushion sand shoes.                                  |
| <b>Cargo Control</b>          | Roadside combination winches with sliding rope hook/winch. Strap hook retainers opposite of winches.                                  |
| <b>Floor</b>                  | 1-1/8" aluminum floor with (4) apitong nailing strips   |
| <b>Bulkhead</b>               | 48" flat, removable aluminum bulkhead with restraint brackets   |
| <b>Lights &amp; Wiring</b>    | Sealed-beam lights with a fully sealed wiring harness and internal ground   |
| <b>Electrical Connections</b> | 7-way ATA plug with no circuit breakers   |
| <b>Air Connections</b>        | Stationary gladhands mounted flush on roadside  |

Trailer specification features may vary based upon manufacturer, model year, trailer type and location.  
Equipment is subject to availability at each location.