




## Straight-frame, Spread-axle Flatbed 48'x96", Air-ride

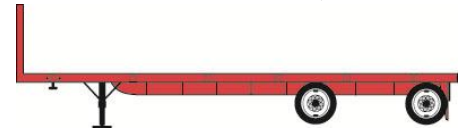

### FEATURES AND BENEFITS

All XTRA Lease flatbeds are spec'd to resist damage, ease loading and reduce maintenance costs. Here are just a few of the top features and benefits for this spec.

#### Loader Friendly

- Cargo Control Combination Winches
- Spread Axle For Increased Payload Capacity

#### Extended Maintenance

- Extended Life Brake Linings
- Synthetic Grease Wheel Ends
- Self-Lubricating Landing Gear

#### Damage Resistant

- Heavy Duty Rub Rails

### SPECIFICATIONS

<b>Overall Length</b>	48'
<b>Overall Width</b>	96"
<b>Deck Height</b>	56"
<b>Coupler Height</b>	50"
<b>Kingpin Setting</b>	36"
<b>Weight</b>	11,800 lbs. +/- 3% (bulkhead + 275 lbs.)
<b>Suspension</b>	Fixed 10'1" spread axle, air-ride suspension. Airbags equipped with self-regulating height control valve and manual dump valve.
<b>Axles</b>	5/8" axle wall, 25,000 lb. capacity with synthetic wheel-end lubricant
<b>Tires</b>	295/75R 22.5 premium radial tires
<b>Wheels</b>	8.25" x 22.5" steel hub-piloted wheels
<b>Brakes</b>	16-1/2" x 7" x 3/4" s-cam, quick-change, extended life brake shoes
<b>ABS</b>	4 sensor / 2 modulator-valve system
<b>Upper Coupler</b>	AAR certified coupler with 1/4" pick-up and 5th-wheel plates. Interior coupler surfaces sealed with corrosion resistant coating
<b>Main Frame</b>	Fabricated high-tensile steel main beams
<b>Side Rails</b>	6" structural steel channel
<b>Rub Rails</b>	2" wide rub rails. Full length both sides, front and rear, reinforced with pipe spools
<b>Stake Pockets</b>	1/4" thick, external steel stake pockets on 24" centers. Full length both sides, front and rear
<b>Crossmembers</b>	4" steel I-beam crossmembers on 12" centers



## Straight-frame, Spread-axle Flatbed 48'x96", Air-ride

### SPECIFICATIONS

<b>Landing Gear</b>	AAR certified, self-lubricating 2-speed landing gear with internal gearbox and cushion sand shoes.
<b>Cargo Control</b>	Combination winches and "c" type rope-hooks
<b>Floor</b>	1-1/8" apitong floor
<b>Bulkhead</b>	48" flat, removable bulkhead
<b>Lights &amp; Wiring</b>	Sealed-beam lights with a fully sealed wiring harness and internal ground
<b>Electrical Connections</b>	7-way ATA plug with no circuit breakers
<b>Air Connections</b>	Stationary gladhands mounted on roadside

Trailer specification features may vary based upon manufacturer, model year, trailer type and location.  
Equipment is subject to availability at each location.